

Dear customer, thank you for purchasing our product. Please read the following instructions carefully and follow them to serve you safely and to your full satisfaction. This will prevent misuse or damage. Avoid unprofessional handling of this appliance and always observe the electrical appliance usage guidelines. Keep the instruction manual carefully. Installation must only be carried out by qualified personnel. This device can be used on a bathroom mirror, on a cabinet, on a shelf, above a picture and other places. The installation height is 1-4 metres.

TECHNICAL PARAMETERS


Product code	WO827-CR	WO827-BLK	WO828-CR	WO828-BLK
Consumption	7W	7W	12W	12W
Luminous flux	455 lm	455 lm	780 lm	780 lm
Voltage	220-240V, 50-60Hz	220-240V, 50-60Hz	220-240V, 50-60Hz	220-240V, 50-60Hz
Chromaticity	4000K (neutral white)	4000K (neutral white)	4000K (neutral white)	4000K (neutral white)
IP coverage	IP44	IP44	IP44	IP44
Operating temperature	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C
Length	400mm	400mm	600mm	600mm
Colour	chrome	Black	chrome	Black

NOTE: IP44 provides splash and dust resistance.

PACKAGING

A - Luminaire

B, C – Types of brackets

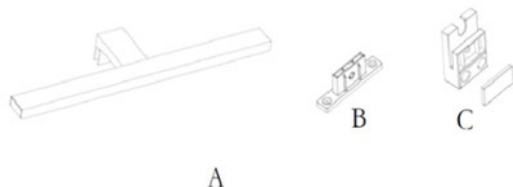


INSTALLATION

Installation on a mirror


1. Connect the supply cable to the terminal block (brown wire L, blue wire N).
2. Attach the device to the mirror using the plastic screws.

NOTE: The width of the mirror should not be less than 7mm.

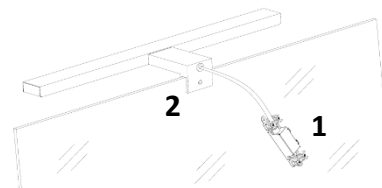


Installation on the cabinet

1. Attach the bracket (B) to the luminaire.
2. Connect the supply cable to the terminal block (brown wire L, blue wire N).
3. Drill the device to the surface.

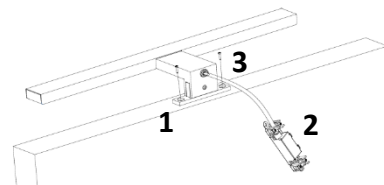

Wall mounting above the mirror

1. Attach the bracket (C) for wall installation.
2. Insert the dowels into the pre-drilled holes.
3. Connect the supply cable to the terminal block (brown wire L, blue wire N).
4. Drill the device to the surface.

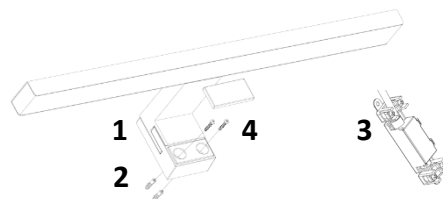

The light source of this luminaire is non-replaceable, at the end of its service life the entire luminaire must be replaced and disposed of in a designated place. This product contains a light source that for design reasons cannot be removed for verification and therefore the entire product is considered a light source. The power cord cannot be replaced if damaged, the unit must no longer be used.

The product has been issued with a CE declaration of conformity in accordance with the applicable regulations.
On request from the manufacturer: info@solight.cz, or downloadable from www.solight.cz/en.

