EN WO8022 | WO8023

LED lighting with remote control



Thank you for purchasing our device. Before installing, using or repairing the device, please read this manual carefully and pay attention to the safety warnings and instructions. This will ensure not only personal safety, but also the long service life of the device. The lighting can be installed directly on the ceiling or suspended using the installation kit (included in the package).

TECHNICAL PARAMETERS

Product code	WO8022	WO8023
Voltage	175-250V AC	175-250V AC
Power	40W	50W
Luminous flux	4300lm	5400lm
Colour temperature	3000K - 6500K	3000K - 6500K
IP rating	IP	IP
LED lifespan	20,000 hours	20,000 hours
Dimensions	500 x 27 mm	600 x 27 mm


INSTALLATION


- 1. Turn off the power supply
- 2. Remove the bracket
- 3. Thread the power cord through the hole in the bracket and screw it in place
- Connect the power cord to the terminal block and ensure that the connections are correct
- 5. Turn the light fixture onto the bracket
- OPTIONAL: Attach the base and hang the device on the cables
- 7. Switch on the power supply

WARNING

- Installation must only be carried out by a qualified technician.
- Do not hang or place anything on the device
- Do not disassemble or repair the device
- For indoor use only

REMOTE CONTROL



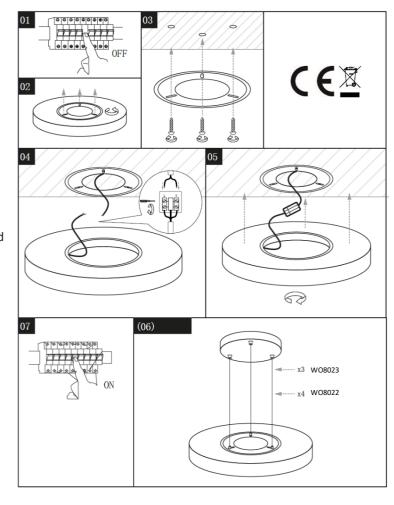

Pairing:

Turn on the device for approx. 3 seconds, press and hold the "Pairing" button, after successful pairing, the controller will flash 3 times.

Cancelling pairing:

Turn on the device for approx. 3 seconds, press the ON button to unpair. After successful unpairing, the controller will flash 3 times.

The light source of this luminaire is not replaceable. At the end of its service life, the entire luminaire must be replaced and disposed of at a designated location. This product contains a light source that cannot be removed for verification due to its design, and therefore the entire product is considered a light source. The power cord cannot be replaced. If it is damaged, the device must not be used.

The product is covered by a CE declaration of conformity in accordance with applicable regulations. Available on request from the manufacturer: info@solight.cz, or downloadable from www.solight.cz/en.

